

## PROGRAMMABLE REMOTE DISPLAY UNIT



### PRODUCT DESCRIPTION

RG.RDA.03 is a programmable remote display unit. It can be used as user interface in various home automation systems.

Device feature QVGA (320x240) TFT color display, 10 capacitive keys with two color dimmable backlight and embedded temperature probe.

The device communicates with the rest of the system using RS485 port.

The device can provide additional functionality thanks to a collection of analog and digital inputs and outputs.

### TECHNICAL DATA

ELECTRICAL SPECIFICATIONS	
Power supply	Nominal: 24 VDC, 1W Voltage range: 12 ... 30 VDC
COMMUNICATION CHANNEL	
RS485	BACnet MS/TP or Modbus Slave RTU/ASCII. Programmable baud rate (9600, 19200, 38400, 76800, 115200), Jumper selectable use of termination and polarization resistors
USB	USB device, mini USB connector, service port
INPUTS	
Embedded temperature probe	1
Resistance measuring inputs for NTC temperature probe	2
OUTPUTS	
Relay outputs, 5 A (250 VAC and 30 VDC)	5
ADDITIONAL SPECIFICATIONS	
Operating temperature	0.. +55 °C
Storage temperature	-30.. +80 °C
Operating humidity	max 95% r.H., no condensation
Protection degree	IP20
Mounting	Wall mounting, for indoor use only
Dimensions	Built in: 72x53x35 mm. Front panel: 130x102x12
Weight	200g


### PRODUCT FEATURES

- » 2.44" QVGA color display
- » 10 capacitive keys with bicolor backlight
- » Embedded temperature probe
- » High level of flexibility thanks to a wide range of IO resources
- » Configuration, programming and debugging is done using PC based tool through USB port
- » Resource sharing between controllers through BACnet network. Data sharing is performed without intervention of the supervisory system
- » Jumper selectable standard polarizing and termination resistors on RS485 terminal

**WIRING AND RESOURCES**

LOCATION	NAME	DESCRIPTION	ADDRESS
Position 1	Power supply 24 VDC -	Device GND	
Position 2	Power supply 24 VDC +	Power supply +	
Position 3	RS485 B-	Communication – line	
Position 4	RS485 A+	Communication + line	
Position 5	AIN common	Device GND	
Position 6	AIN1	Analog input	IW1
Position 7	AIN common	Device GND	
Position 8	AIN2	Analog input	IW2
Position 9	NC		
Position 10	BOUT1	Binary output	QX20
Position 11	BOUT2	Binary output	QX21
Position 12	BOUT3	Binary output	QX22
Position 13	BOUT4	Binary output	QX23
Position 14	BOUT5	Binary output	QX24
Position 15	BOUT common	Common terminal for BOUT	
Position 16	NC		

**DIMENSIONS AND MOUNTING**

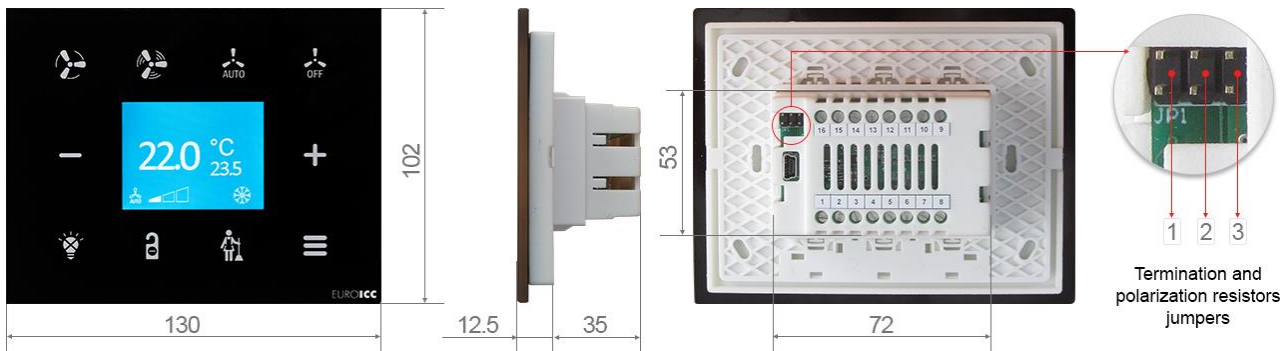

**SAFETY NOTES**



- The device is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- It may only be installed by suitably trained personnel.
- Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer’s site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.